



REINFORCING STEEL PATTERN NO.1

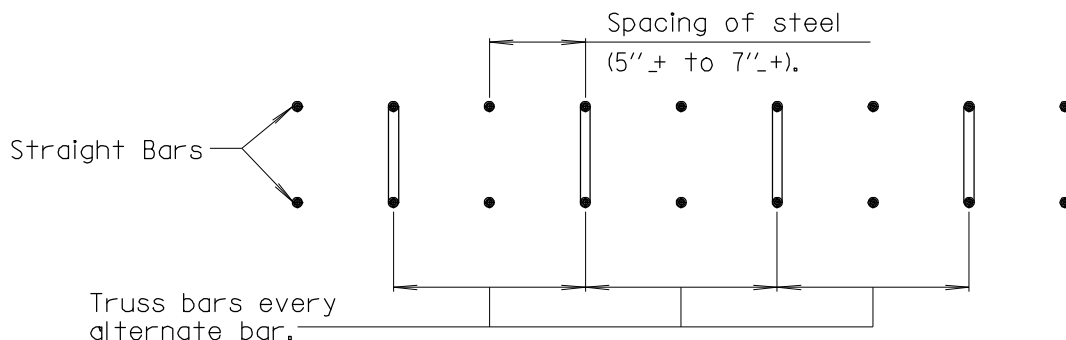


REINFORCING STEEL PATTERN NO.2

1. The Contractor has the option of using Reinforcing steel Pattern No.1 or No.2 in the unhatched portions of the decks shown below.
2. The Contractor shall use only Reinforcing Steel Pattern No.1 in the hatched portions of the decks shown below.

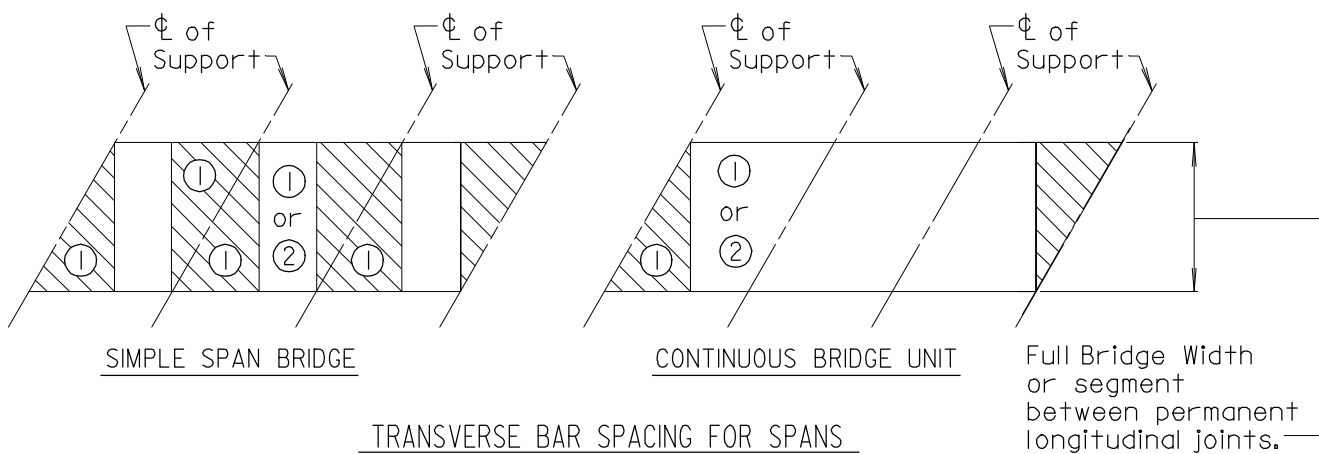

TRANSVERSE BAR SPACING FOR SPANS
WITH SKEW ANGLES LESS THAN 60°

Scale: 1"=1'-0"

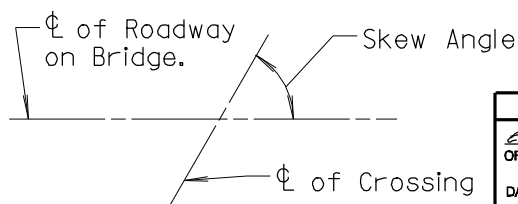

SKEW ANGLE
Scale: None

APPROVAL	
<i>L.S. Friedman</i>	DIRECTOR OFFICE OF BRIDGE DEVEL.
DATE: 12/4/79	
REVISIONS	
SHA	FHWA
3-1-84	6-8-90
11-18-87	6-8-90
9-25-89	6-8-90
10-9-07	.

FHWA APPROVAL
DATE: 6-8-90

STATE OF MARYLAND
DEPARTMENT OF TRANSPORTATION
STATE HIGHWAY ADMINISTRATION
OFFICE OF BRIDGE DEVELOPMENT

BRIDGE DECK SLAB
GENERAL NOTES AND BAR SPACING

STANDARD NO. BR-SS(6.11)-79-90(L)

SHEET 2 OF 2



SUPER-CONCRETE WORK